

MT-402005/N

3.3-3.8GHz 9dBi Omni Directional Antenna




Specifications


| MTI PART NUMBER | | MT - 402005/N | | |
|--------------------------------|----------------------|--|-------------|-------------|
| ELECTRICAL | | | | |
| FREQUENCY RANGE | | 3.3-3.8GHz | | |
| PEAK GAIN | | 7 dBi (min) 3.3-3.4 GHz 9dBi (min) 3.4-3.8 GHz | | |
| VSWR | | 2.5:1 (typ) @ 3.3-3.4GHz 1.7:1 (max) @ 3.4-3.8GHz | | |
| AZIMUTH BEAMWIDTH | | Omni | | |
| POLARIZATION | | Linear Vertical | | |
| AZIMUTH RIPPLE | | 8.5° (typ) @ 3.3-3.7GHz 8° (typ) @ 3.7-3.8 GHz | | |
| ELEVATION BEAMWIDTH | | 3 dB (max) @ 3.3-3.7GHz 4 dB (max) @ 3.7-3.8 GHz | | |
| E - PLANE | | -8 dB (typ) | | |
| INPUT IMPEDANCE | | 50 (ohm) | | |
| INPUT POWER | | 4W (max) | | |
| LIGHTNING PROTECTION | | DC Grounded | | |
| MECHANICAL | | | | |
| DIMENSIONS - DIAMETER X HEIGHT | | 75mm X 580mm (max) | | |
| WEIGHT | | 1.5 kg (max) | | |
| CONNECTOR | | N-Type Female | | |
| RADOME | | Plastic, UV Resistance | | |
| BASE PLATE | | Aluminum with chemical conversion coating | | |
| OUTLINE DRAWING | | See page 2 | | |
| MOUNTING KIT | | Mounted to Pole Ø 1.5" - Ø 3" by the means of 2 clamps | | |
| ENVIRONMENTAL | | | | |
| TEST | STANDARD | DURATION | TEMPERATURE | NOTES |
| LOW TEMPERATURE | IEC 68-2-1 | 72 h | -55°C | - |
| HIGH TEMPERATURE | IEC 68-2-2 | 72 h | +71°C | - |
| TEMP. CYCLING | IEC 68-2-14 | 1 h | -45°C +70°C | 3 Cycles |
| VIBRATION | IEC 60721-3-4 | 30 min/axis | - | Random 4M3 |
| SHOCK MECHANICAL | IEC 60721-3-4 | - | - | 4M3 |
| HUMIDITY | ETSI EN300-2-4 T4.1E | 144 h | - | 95% |
| WATER TIGHTNESS | IEC 529 | - | - | IP67 |
| SOLAR RADIATION | ASTAM G53 | 1000 h | - | - |
| FLAMMABILITY | UL 94 | - | - | Class HB |
| SALT SPRAY | IEC 68-2-11 Ka | 500 h | - | - |
| ICE AND SNOW | - | - | - | 25mm Radial |
| WIND SPEED SURVIVAL | - | - | - | 220 Km/h |
| OPERATION | - | - | - | 160 Km/h |
| WIND LOAD SUR. FRONT TH. | - | - | - | 6.5kg |
| SIDE THRUST | - | - | - | 6.5 kg |

3.3-3.8GHz 9dBi Omni Directional Antenna


Azimuth Radiation Pattern
Midband Freq. 3.5 GHz

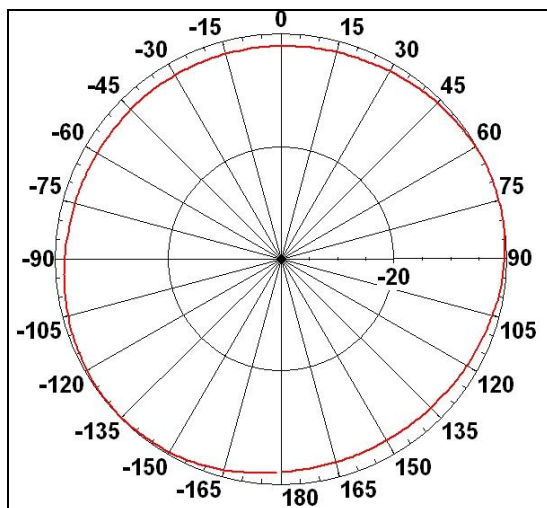

Elevation Radiation Pattern
Midband Freq. 3.5 GHz

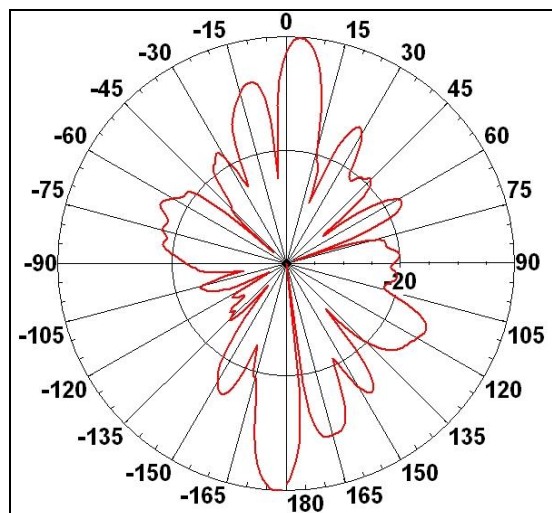

Dimensions [mm]

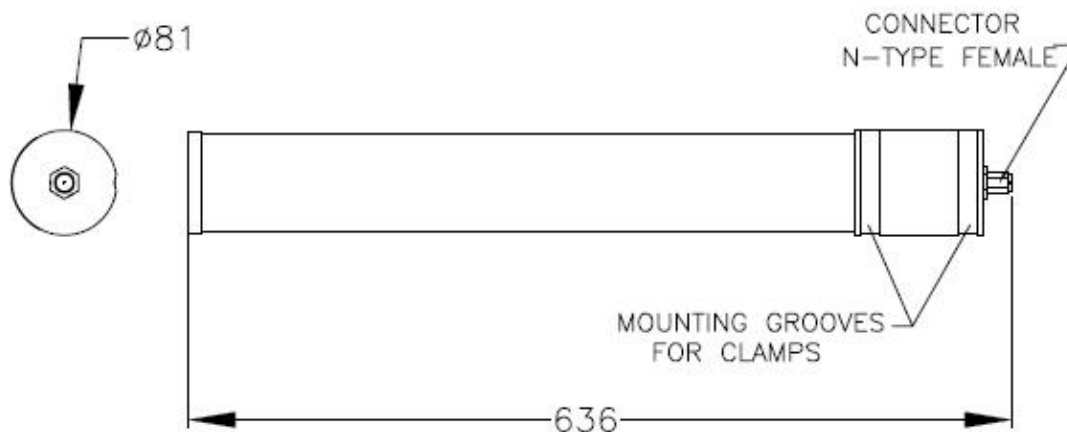

Existing Antenna Versions

| | |
|--|--|
| | |
| | |

MTI Wireless Edge is certified according to ISO 9001 and ISO 14001.

WAIVER!

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

MTI Wireless Edge Ltd.

11 Hamelacha St.
Afek Industrial Park
Rosh Ha'ayin 48091, Israel
Tel: +972-3-9008900
Fax: +972-3-9008901
www.mtiwe.com