

MT-405037/N

3.3-3.8 GHz 21dBi Subscriber Antenna




Specifications


MTI PART NUMBER		MT - 405037/N		
ELECTRICAL				
REGULATORY COMPLIANCE		ETSI EN 302 085 V1.2.2 (2003-08) Range 1, RoHS , CE 0682		
FREQUENCY RANGE		3.3-3.8 GHz		
GAIN		20 dBi (min) @ 3.3 - 3.4GHz		
		21 dBi (min) @ 3.4 - 3.8GHz		
VSWR		1.7 :1 (typ)		
3dB BEAMWIDTH		12° (typ)		
POLARIZATION		Linear Vertical or Horizontal		
SIDELOBES LEVEL		ETSI EN 302 085 V1.2.2 (2003-08) TS1 -TS3		
CROSS POLARIZATION		ETSI EN 302 085 V1.2.2 (2003-08) TS1 -TS3, -20 dB (max)		
F/B RATIO		ETSI EN 302 085 V1.2.2 (2003-08) TS1 -TS3, -30 dB (max)		
INPUT IMPEDANCE		50 (ohm)		
INPUT POWER		6W (max)		
LIGHTNING PROTECTION		DC Grounded		
MECHANICAL				
DIMENSIONS (LxWxD)		450x450x36mm (max)		
WEIGHT		3 (kg) (max)		
CONNECTOR		N-Type Female		
RADOME		Plastic		
BASE PLATE		Aluminum with chemical conversion coating		
OUTLINE DRAWING		See page 2		
MOUNTING KIT		120018		
ENVIRONMENTAL				
TEST	STANDARD	DURATION	TEMPERATURE	NOTES
LOW TEMPERATURE	IEC 68-2-1	72 h	-55° C	-
HIGH TEMPERATURE	IEC 68-2-2	72 h	+71° C	-
TEMP. CYCLING	IEC 68-2-14	1 h	-45° C +70° C	3 Cycles
VIBRATION	IEC 60721-3-4	30 min/axis	-	Random4M5
SHOCK MECHANICAL	IEC 60721-3-4	-	-	4M5
HUMIDITY	ETSI EN300-2-4 T4.1E	144 h	-	95%
WATER TIGHTNESS	IEC 529	-	-	IP64
SOLAR RADIATION	ASTM G53	1000 h	-	-
FLAMMABILITY	UL94	-	-	Class HB
SALT SPRAY	IEC 68-2-11 Ka	500 h	-	-
ICE AND SNOW	-	-	-	25mm Radial
WIND SPEED SURVIVAL	-	-	-	220 Km/h
OPERATION	-	-	-	160 Km/h
WIND LOAD (SURVIVAL)	-	-	-	-
FRONT THRUST	-	-	-	57.8 kg
SIDE THRUST	-	-	-	4.6 kg

3.3-3.8 GHz 21dBi Subscriber Antenna


Azimuth Radiation Pattern
Midband Freq. 3.3 GHz

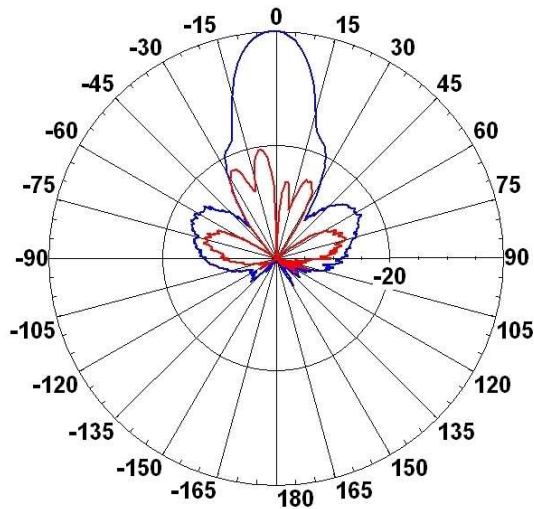

Elevation Radiation Pattern
Midband Freq. 3.3 GHz

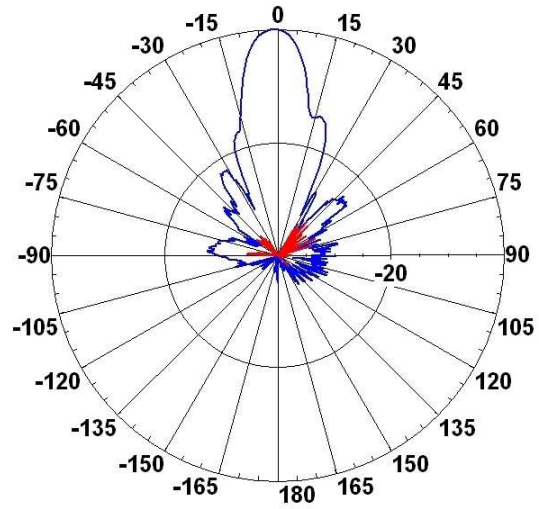

Dimensions [mm]

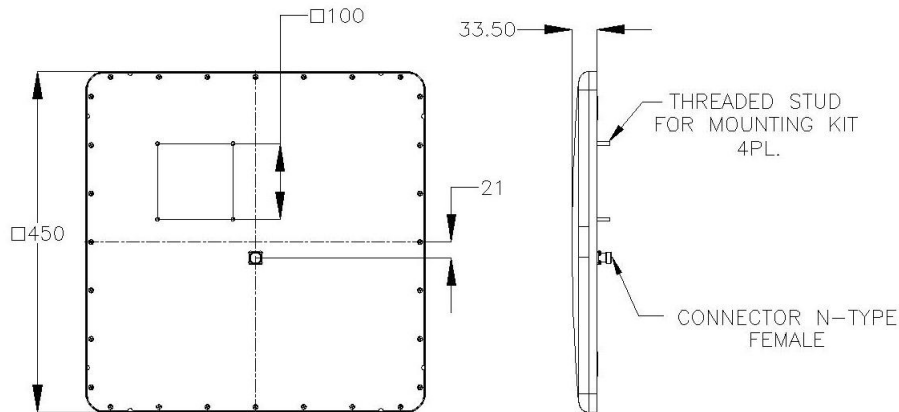

Existing Antenna Versions

MT-405037/S/E	Integrated Antenna - Enclosure Version

MTI group is certified according to ISO 9001 and ISO 14001.

WAIVER!

While the information contained in this document has been carefully compiled to the best of our present knowledge, it is not intended as presentation or warranty of any kind on our part regarding the fitness of the products concerned for any particular use or purpose and neither shall any statement contained herein be construed as a recommendation to infringe any industrial property rights or as a license to use any such rights. The fitness of each product for any particular purpose must be checked beforehand with our specialists.

MTI Wireless Edge Ltd.

11 Hamelacha St.
Afek Industrial Park
Rosh Ha'ayin 48091, Israel
Tel: +972-3-9008900
Fax: +972-3-9008901
www.mtiwe.com